


BUBBLESORPTION INSTALLATION GUIDE

Bubblesorption cannot be easier to install. It is simply press and stick with no pre-drilling or screws required.

Velcro strips are fixed on the back of each panel with a detachable self-adhesive strip. These are located close to the edge of each tile and it is important to check each panel to ensure the strips are there and properly located. It should not be possible to see the Velcro when the panels are mounted.

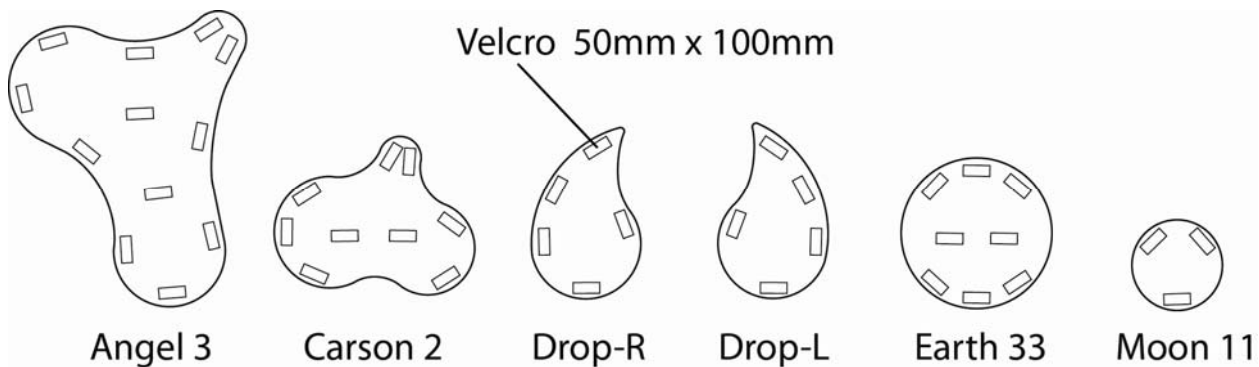

The Velcro method of fixing is sufficient for mounting onto flat, dry, non-greasy surfaces. If the wall is uneven such as with bare masonry or in an area where strong draughts are experienced, alternative fixing methods may have to be adapted. Because this product is fabric covered sound absorbing foam, it could easily be damaged so is advised to be fitted at a level where it is going to be safer. If extra durable mountings are required, please contact us for advice before ordering.

You can then refer to our design details showing a combination of alternative mounting methods. The various shapes of Bubblesorption are designed to be placed within a certain distance from each other for maximum effect and 6-7cm is usual. The design details can be seen on our website.

Lay it out on the floor according to the design you wish to use as exact as possible. Panels should be installed on a flat & level wall.

Measure the distance between each tile then mark the wall where the tiles are to be fitted in relation to the pattern you want. It is best to use a marker that can be wiped away when finished. Then take each tile, hold it against the wall where you want it to be fitted and make little marks around it, remove the release paper from the back of the Velcro strips then press the panels lightly to the wall in the marked position. It is important the tile is only lightly adhered because you may want to reposition it. Then take a step back to check. It can be adjusted a little if you like. When you are satisfied with the placement, press and press firmly on all the panels, to be sure the adhesive adheres to the wall.

Note: The glue can tear pieces of paint and wallpaper when removed. We do not take responsibility if that happens.



EST. 1969

Crawley Mill, Dry Lane, Witney, Oxfordshire, OX29 9TJ

sales@soundservice.co.uk

VAT NO: GB 434 5018 73 REG NO: 960986

Tel: 0845 363 7131

Fax: 01993 779569